


# RC8 ROBOT CONTROLLER

The DENSO RC8 is 60 percent smaller and 45 percent lighter than the previous model, yet offers higher performance levels. Outstanding features include:


- World's smallest robot controller in the 3 kW output class
- Compact size saves valuable floor space, facilitates integration
- Footprint only 12 x 18 in (300 x 456 mm)
- Weighs only 26.5 lbs (12 kg)
- Built-in ORiN open-resource interface allows communication with more than 100 different types of devices
- 100 Base-T Ethernet, mini/hand I/O, RS-232C and USB standard
- CC-Link, DeviceNet, EtherCAT, EtherNet/IP, parallel discrete I/O, Profibus and Profinet optional
- Microsoft Windows-based graphical user interface reduces robot setup time
- ISO and UL safety compliance allows global deployment



## External Dimensions

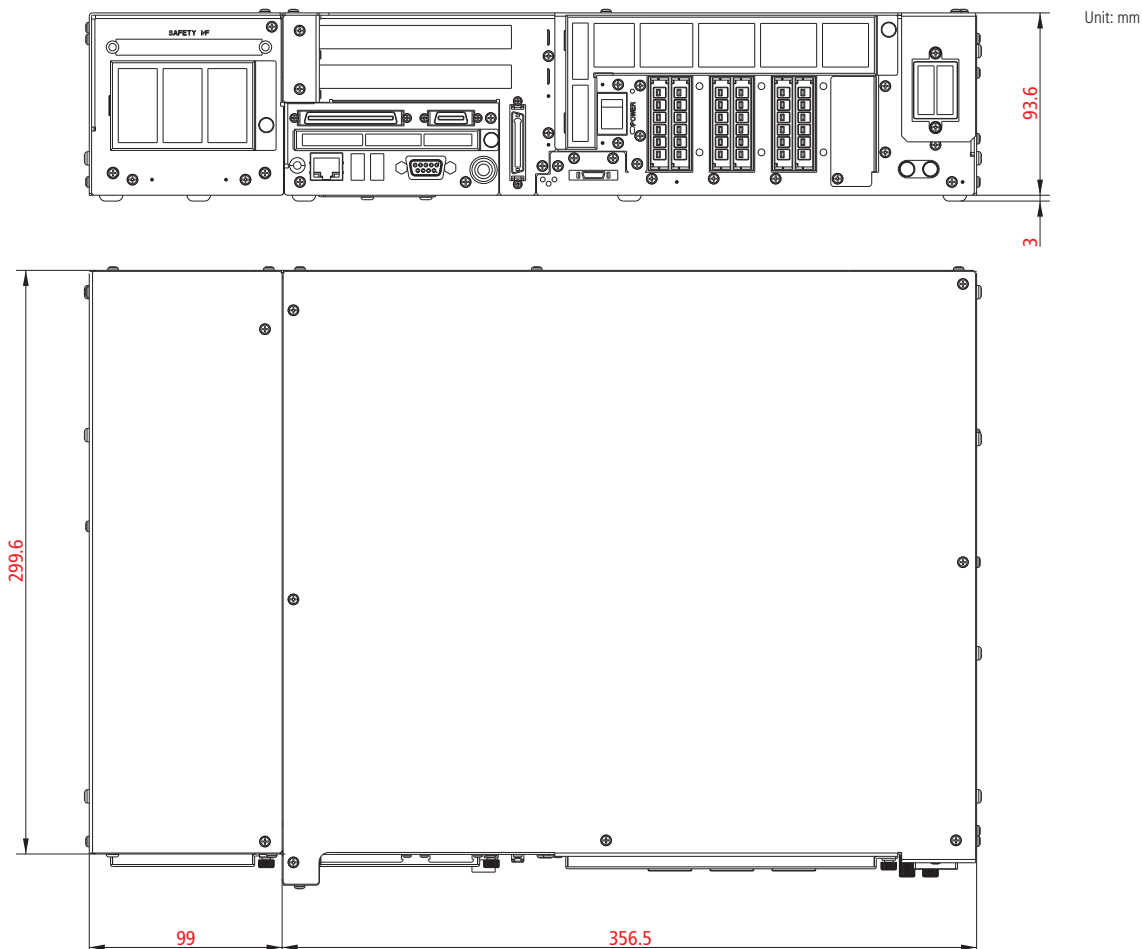

# RC8 ROBOT CONTROLLER

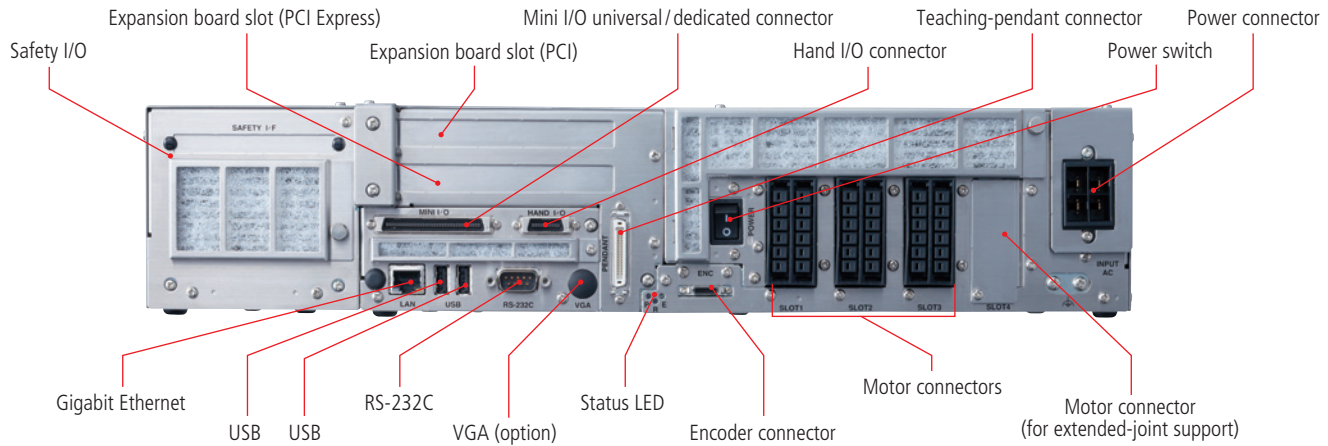

## Specifications

		VP -5243/6242	VP -6242G2	VS -050/060	VS -068/087	VM -6083/60B1	HS -45***	HM -4***	XR -43***1	
Power	Power supply (kVA)	1.00 <sup>1</sup>	1.00 <sup>1</sup>	1.15	2.78	3.30	1.80	2.45	1.80	
	Input voltage range	Three phase, 200 VAC -15% to 240 VAC +10% (100 V specification also available for VP series)								
	Power supply frequency	Single phase, 200 VAC -15% to 240 VAC +10% <sup>1</sup>						Single phase, 200 VAC -15% to 240 VAC +10%		
Power cable		50/60 Hz								
Power cable		5 m								
Controllable axes		5/6 <sup>2</sup>	6 <sup>2</sup>				4 <sup>2</sup>			
Control method		PTP, CP 3-dimensional linear, 3-dimensional arc (PTP control only for additional axes)								
Drive method		Digital AC servo on all axes								
Language used		DENSO Robotics language (PacScript)								
Memory capacity, user area		Variable area: 1.75 MB (equivalent to 65,000 points); File area: 400 MB (5,000 steps × 256 files)								
Teaching system		Remote teaching Numerical entry (MDI) Direct teaching (HS Series and HM Series only)								
External signal (I/O, etc.) <sup>3</sup>	Universal / dedicated I/O	Mini I/O	Input: 8 open user points + 14 fixed system points (safety-I/O-less version has 13 fixed system points) <sup>3</sup> Output: 8 open user points + 16 fixed system points (safety-I/O-less version has 12 fixed system points)							
		Hand I/O	Input: 8 open user points; Output: 8 open user points							
	Parallel I/O boards (option)		Bus: PCI Input: 40 open user points; Output: 48 open user points							
	DeviceNet slave board (option)		Bus: PCI Express Input: 256 points; Output: 256 points							
	CC-Link remote device board (option)		Bus: PCI Express Input: 128 points; Output: 128 points; Remote registers, Input: 256 points; Output: 256 points							
	Profibus slave board (option)		Bus: PCI Express Input: 256 points; Output: 256 points							
EtherNet/IP adapter board (option)		Bus: PCI Express Input: 4,032 points; Output: 4,032 points								
External communication		RS-232C: 1 line; Gigabit Ethernet: 1 line; USB: 2 lines								
Expansion slot		PCI: 1 slot; PCI Express: 1 slot								
Self-diagnosis function		Overrun, servo error, memory error, input error, short-circuit detection (user wiring required), etc.								
Environmental condition (in motion)		Temperature: 0 to 40 °C; Humidity: 90% or less RH (no condensation allowed)								
Safety category		Standard specification: Category 4, PL = e (ISO 13849-1, 2006) <sup>4</sup>								
Protection level		IP20								
Weight		Standard: Approx. 12 kg <sup>5</sup>								

1. Power for 100 VAC specification: Single phase 100 VAC -10% to 110 VAC +10% 50/60 Hz, 1 kVA.

2. Up to two additional axes optional. Power modules, motors and cabling not included.

3. Support for EtherCAT and Profinet adapter board scheduled for March 2013.

4. If built-in safety I/O is not required, please specify safety-I/O-less controller.

5. Does not include supplied cables.

## DENSO ROBOTICS

3900 Via Oro Avenue, Long Beach, California 90810, U.S.A

Tel: 888-4-ROBOTX (888-476-2689) | Fax: (310) 952-7502 | info@densorobotics.com

© 2013 DENSO Corporation

Information subject to change without notice

**DENSO**  
robotics

www.densorobotics.com