


UR Ready - Heavy Duty

Begin your automation journey with UR's most powerful cobots.

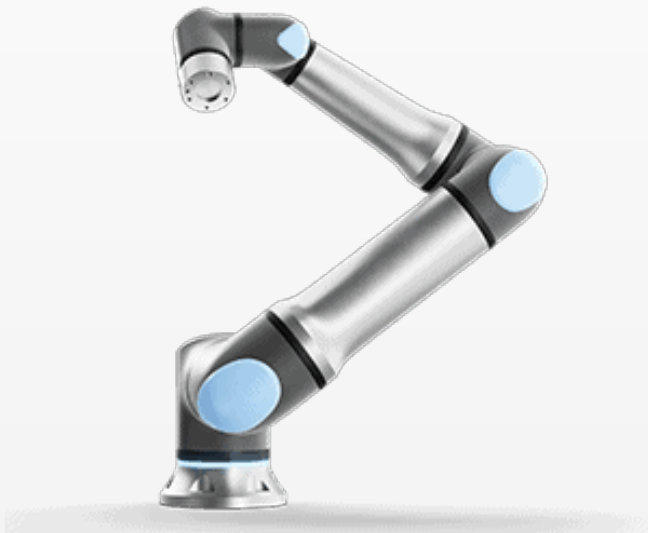

Olympus Controls, your local automation partner, provides the hardware and expertise you need to unlock immediate productivity using Universal Robots.

Includes what you need* to start automating today and...

\$7,000 savings

*tooling sold separately

UR Ready kit includes:

\$1,000 credit towards your next robot!

UR20 (20 kg / 1,740 mm) or UR30 (30 kg / 1,300 mm)

30 month warranty

Pedestal (12" to 60", custom colors available)

Multi-zone safety scanner

Certified Training (2-day course)

Cable management

Pendant protection

Remote monitoring w/ UR Insights



Gripper Kits

Everything you need to handle your parts, courtesy of the Zimmer Group.

Base - Pneumatic

Grip your parts no matter if they're square or round.

Price* \$4,430

Gripping Force 850 N

Stroke per jaw 10 mm

Base Weight 0.87 kg

3-finger adder +\$700 / +1kg

IP Rating IP64

*includes fittings, tubing, air handling, but no air supply.



Electric Version

No air available? We've got some electrons for you.

Electric adder +\$1,000 / <1 kg

Input Power 24 VDC (5A)

Dual-grip

Need an extra hand? We've got that too.

Includes blowoff nozzle for part/tool cleaning.



The UR20 is long

At nearly 6ft tall the UR20 is Universal Robots' longest arm yet.

Pricing & Availability

UR Ready Kit Price	\$69,000
Lead Time	6-8 weeks
Part number	SA0180913

Specifications

Payload	20 kg (44 lbs)
Reach	1,750 mm (69 in)
IP Classification	IP65 (water resistant)
Input Power	100-240 VAC (750 W)
Weight	64 kg (141 lbs)
Temperature Range	0-50C (32-122 F)
ISO Cleanroom Rating	5
I/O Power Supply	24V (2A)

Performance

Repeatability	0.1 mm (0.004 in)
Maximum joint speed	120/s to 210/s
Typical TCP speed	2 m/s
Force Sensing Precision	5.5 N (0.2 Nm)



The UR30 is strong

The capability to lift over 60lbs makes the UR30 Universal Robots' strongest arm yet.

Pricing & Availability

UR Ready Kit Price	\$68,000
Lead Time	6-8 weeks
Part number	SA0180914

Specifications

Payload	30 kg (66 lbs)
Reach	1,300 mm (51 in)
IP Classification	IP65 (water resistant)
Input Power	100-240 VAC (750 W)
Weight	64 kg (140 lbs)
Temperature Range	0-50C (32-122 F)
ISO Cleanroom Rating	5
I/O Power Supply	24V (2A)

Performance

Repeatability	0.1 mm (0.004 in)
Maximum joint speed	120/s to 210/s
Typical TCP speed	2 m/s
Force Sensing Precision	5.5 N (0.2 Nm)

