

Vertical Articulated Robot
VM·VL series

DENSO

Robot controller

RC9

More powerful, Much longer



VM series

VM1500 / 1800

Max. arm length

1506/1804mm

Max. movable load

25kg

Features

Built for use in demanding hygienic and adverse environments


Available with standard specifications as well as specifications that deliver high levels of dustproofness/waterproofness (IP67) and cleanliness (ISO Class 5)*. The VM series can be used to automate operations in a variety of industries, including automobile part manufacturing and electric and electronic component, food product, pharmaceutical, and medical device manufacturing processes.



Fully covered design

Internally routed EtherCAT wiring and free hand design

An extensive range of options for user wiring, tubing, and solenoid valves makes it possible to mount a variety of devices and hands on the robot flange. Mix and match three valve types for a total of 15 possible combinations. Internally routed EtherCAT wiring means less complex wiring and tubing on the outside of the unit.





Secondary user wiring and tubing
Up to two EtherCAT runs can be routed inside the unit.



User wiring and tubing can be routed through the three axes to accommodate devices mounted on the robot arm.

Example application

Transferring, transporting, and packaging work

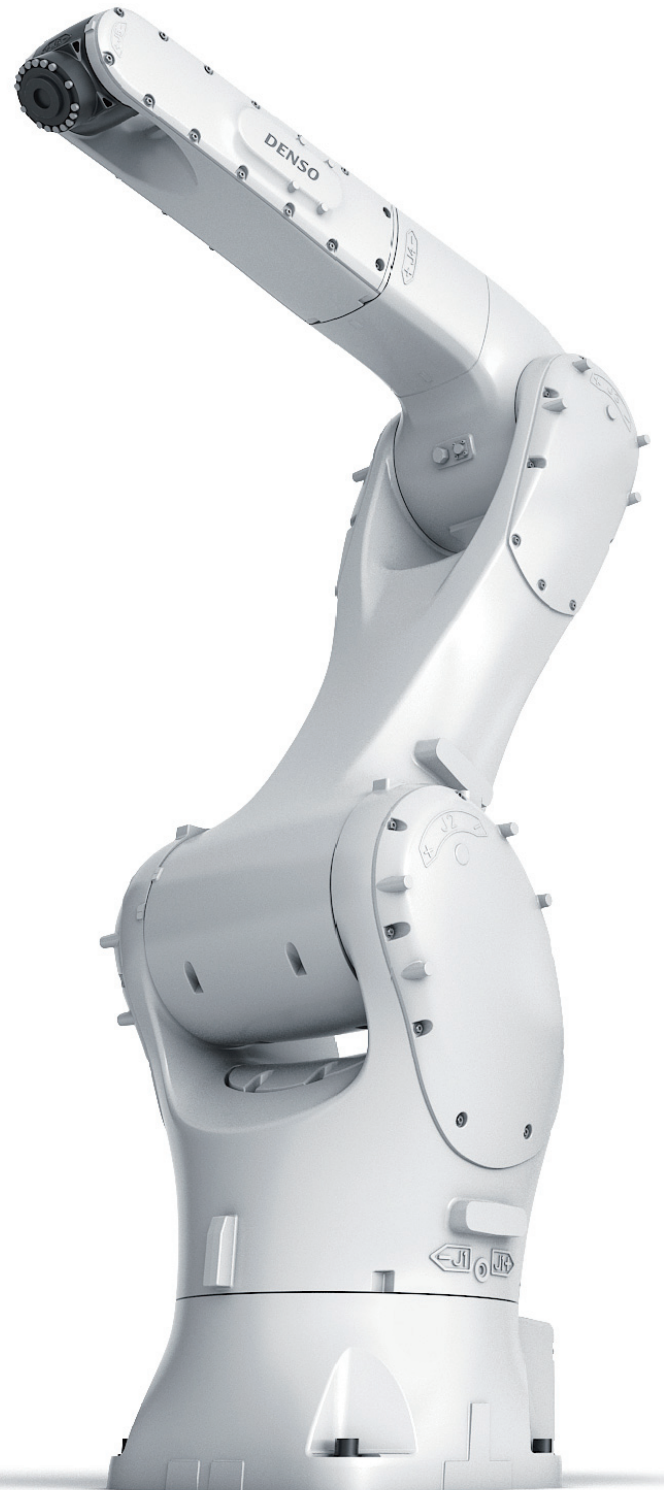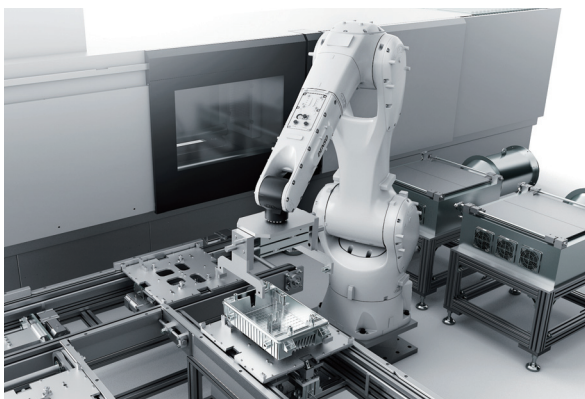

VL series

VL2500

Max. arm length

2503mm

Max. movable load

40kg

Features

Designed for adverse environments

The VL series brings IP67* level protection to automation in demanding environments where the robot would be exposed to oil and mist spray.

*The wrist offers IP67 level protection, while the rest of the unit offers IP65 level protection.




Ideal for transporting and palletizing heavy objects

The VL series features the highest load capacity and the longest arm of any DENSO robot, making it ideal for automating work that involves transporting or palletizing heavy objects.

Combine the VL series with Palletizing Builder, which is part of the WINCAPS Plus offline programming software suite, to automate palletizing work without writing any code.


WINCAPS Plus Palletizing Builder

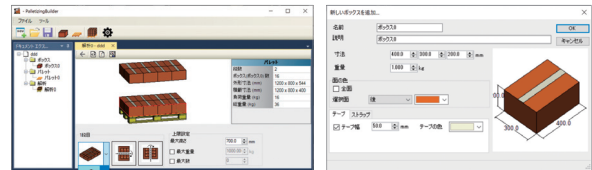

This software simplifies programming by automatically calculating target positions for palletizing and depalletizing processes.

Multi-bus cables

The VL series is wired internally for connection to field networks to reduce the complexity of wiring outside the unit. Supported communications standards: Profinet, Profibus, DeviceNet

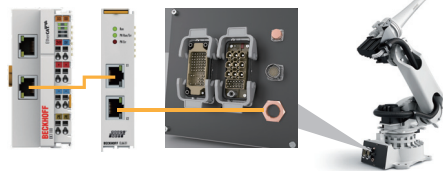

Example application

Palletizing and depalletizing work




New robot controller

RC9


Delivering the simplicity that DENSO robots are designed to provide

This controller lets you build a system by choosing the optimal robot, peripheral equipment, and software for your application. The new teaching devices and application software "WINCAPS Plus" are also available to achieve further simplification while inheriting the RC8 development environment. It offers simplicity and peace of mind to all personnel involved with equipment setup and operation.

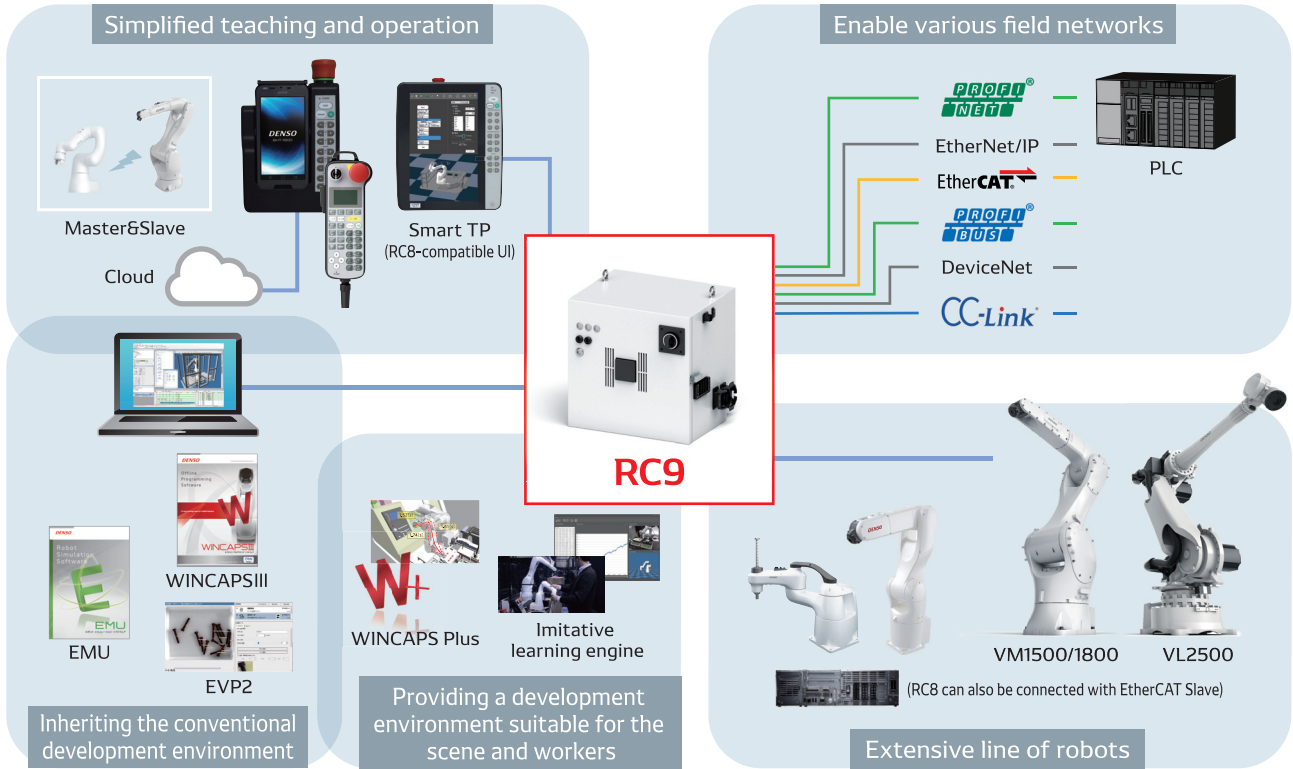


Controller that realizes integrated equipment control

RC9 can be provided with firmware. Since it has the selectivity that can be optimized according to the application, the openness that allows the fusion of user, Sier, and maker technologies, and the expandability that allows the entire system to be simply integrated, simple equipment integrated control is realized.

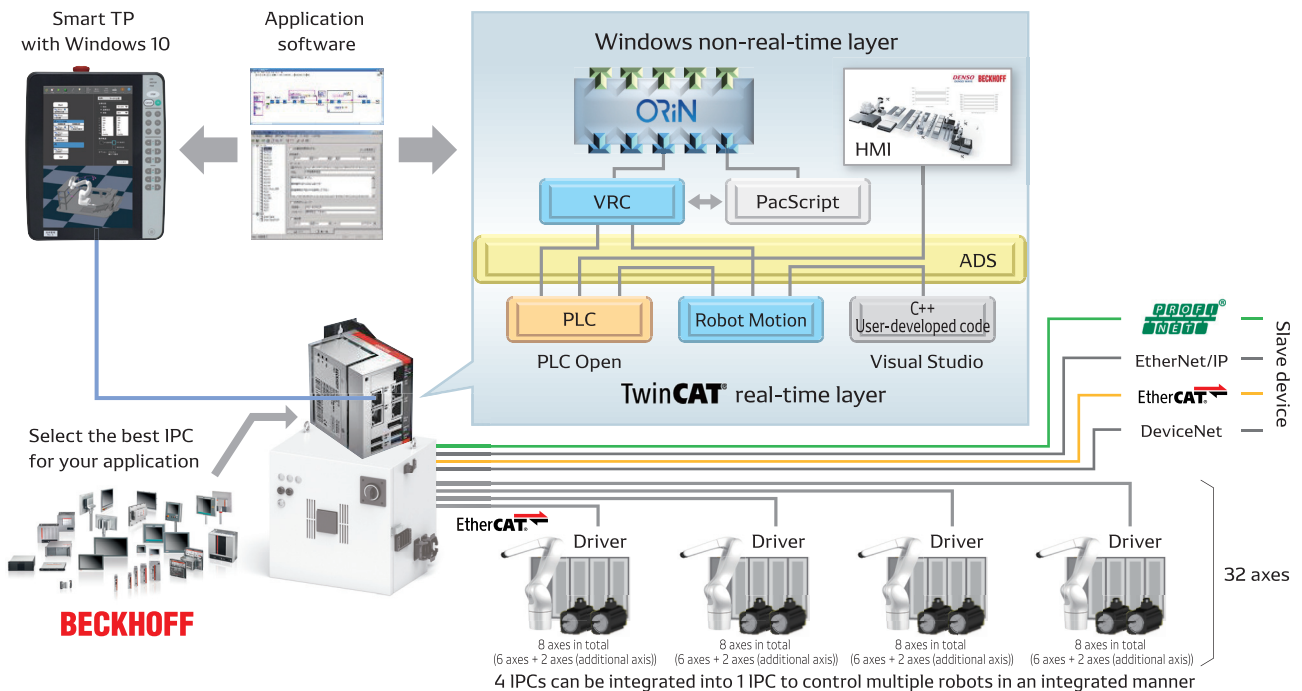

System configuration

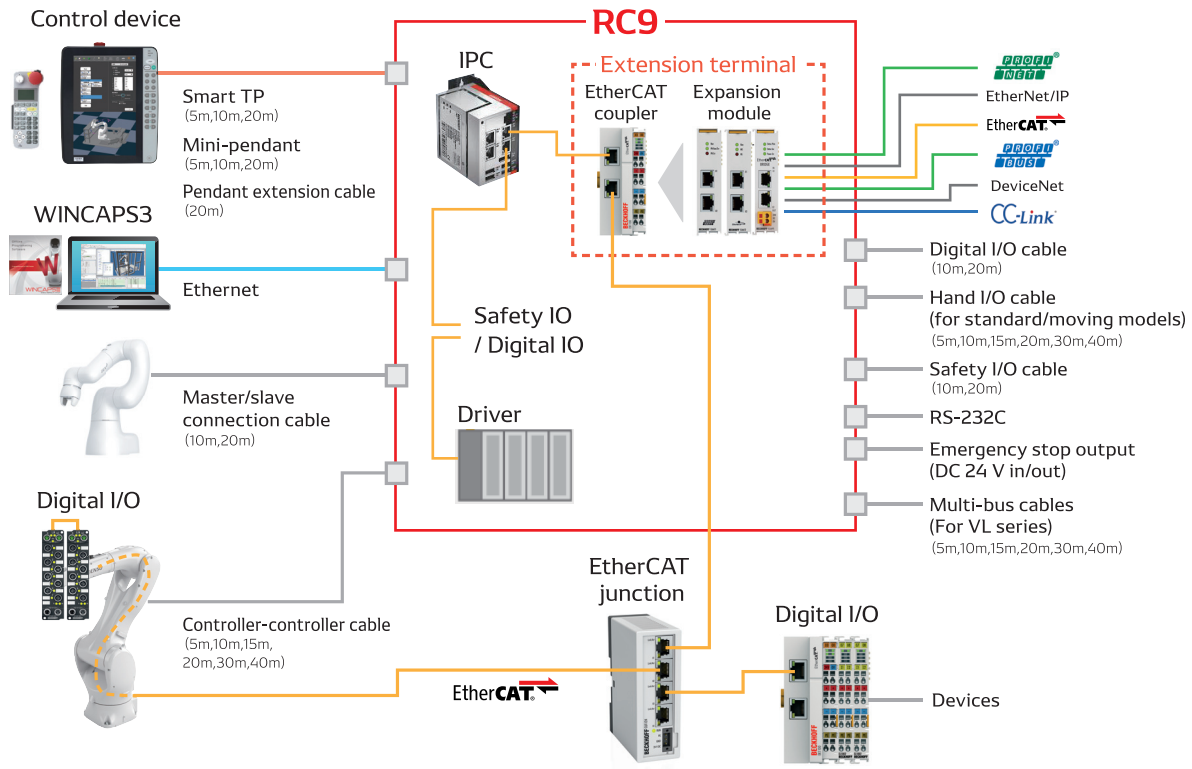

List of expansion options

Cables	Power cable for EtherCAT box	M8-Open : 2, 10, 40m M8-M8 : 0.5, 2, 5, 10, 20, 40m 7/8"-open, movable : 2, 10, 40 m 7/8"-7/ 8", movable : 0.5, 2, 5, 10, 20, 40 m
	EtherCAT cable for EtherCAT box	M8-RJ45, movable : 0.5, 2, 5, 10, 20, 40 m M8-M8: 0.5, 2, 5, 10, 20, 40m
IO-Link sensor cables	DIO sensor cables	M12-Open, Class A : 0.5, 2, 10, 40m
		M12-M12, Class A : 2, 5, 10, 20, 40m
		M12-Open, Class B : 2, 10, 40m
EtherCAT cables	M12-M12, Class B, movable : 0.5, 2, 5, 10, 20, 40 m	
	M8-Open : 2, 10, 40m	
Expansion functionality (USB dongle/license)	EtherCAT cables	RJ45-RJ45 : 0.5, 2, 5, 10, 20, 40m RJ45-RJ45, movable : 0.5, 2, 5, 10, 20, 40 m
	Expansion functionality (USB dongle/license)	TwinCAT3 PLC
	Expansion functionality (USB dongle/license)	TwinCAT3 OPC UA
	Expansion functionality (USB dongle/license)	TwinCAT3 PLC + HMI Web
	Expansion functionality (USB dongle/license)	TwinCAT3 PLC + OPC UAb
Expansion functionality (USB dongle/license)	Expansion functionality (USB dongle/license)	TwinCAT3 PLC + HMI Web + OPC UAb

I/O terminals	Expansion options	Ports
EtherCAT junction		3 ports, 4 ports, 8 ports
EtherCAT bridge terminal		
Profinet RT controller terminal		
Profinet RT device terminal		
Ethernet/IP master terminal		
Ethernet/IP slave terminal		
Profibus master terminal		
Profibus slave terminal		
DeviceNet master terminal		
DeviceNet slave terminal		
CC-Link slave terminal		
RC232C 2-channel terminal		
RS422/RS485 2-channel terminal		
Digital input terminal (PNP, 8-point, 10 μs, IP20)		
Digital input terminal (PNP, 16-point, 3 μs, IP20)		
Digital output terminal (PNP, 8-point, 0.5 A, IP20)		
Digital output terminal (PNP, 16-point, 0.5 A, IP20)		
Digital input terminal (NPN, 8-point, 10 μs, IP20)		
Digital input terminal (NPN, 16-point, 3 μs, IP20)		
Digital output terminal (NPN, 8-point, 0.5 A, IP20)		
Digital output terminal (NPN, 16-point, 0.5 A, IP20)		
Digital output terminal (NPN, 16-point, 0.5 A, IP20)		
Digital I/O terminal (PNP, 16-point, 3 ms, IP67)		
Digital I/O terminal (NPN, 16-point, 3 ms, IP67)		
IO-Link master, Class A, IP67		4 ports, 8 ports
IO-Link master, Class B, IP67		4 ports, 8 ports
EtherCAT coupler terminal (standalone)		
EtherCAT expansion terminal		
Ethernet expansion module (assembly)		
EtherCAT coupler terminal + bus end-cap set (assembly)		
Bus end-cap (standalone)		
Digital I/O protective plug (M8, set of 50)		
IO-Link protective plug (M12, set of 50)		

Smart TP

The Smart TP is a multifunctional teaching pendant that can be used in a variety of situations to teach based on robot settings or as an equipment display.

Features

Large touch panel

The Smart TP runs Windows 10 and features a large, 10.1-inch screen for improved ease of use.

Improved GUI to increase work efficiency


The Smart TP offers an easy-to-see menu architecture and excellent ease of use. Its GUI and functionality have been improved so that you can check simulations related to robot deployment on the pendant, shortening work times.

The Smart TP provides IP65 level drip-proof protection

Functionality


RC8-compatible UI

The Smart TP is compatible with the existing RC8 controller so that you can continue using the same development environment and operability that you've enjoyed to date.




TwinCAT3 PLC/HMI

It can display screens created with TwinCAT3 PLC/HMI.

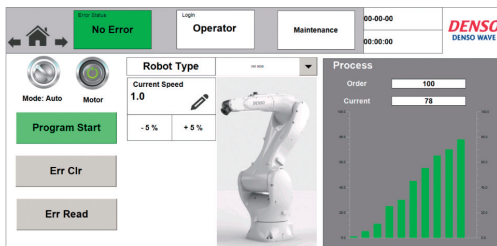

WINCAPS Plus UI

Offline programming software suite, The Smart TP supports the WINCAPS Plus GUI.

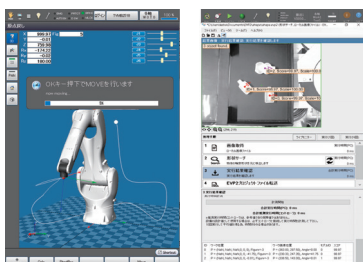

Applications

As a teaching pendant

The Smart TP incorporates teaching functionality that can be used to adjust individual robot axes.



As an equipment control panel display

It can serve as a display for not only the robot, but the entire equipment setup.



As a programming-use computer

It can run not only WINCAPS Plus, but also customer-developed and general-purpose applications. It can be connected to a keyboard and used to author programs.



Specifications

Size	10.1" (16:10)
Resolution	WXGA (800 × 1,280 pixels)
Touch screen	Transmissive capacitive touch panel
Backlight	LED
Dimensions (length × width × height)	215×284×69mm
Weight	Approx. 1,120 g


VL series options and specifications

Specifications

Robot name		VLA-4025W5
Number of axes		6
Drive motor/brake		AC servomotor (all axes) (with brake for all axes)
Total arm length (arm 1 + arm 2) [mm]		2085.5 (860+1225.5)
Maximum area of operation (P-point) [mm]		2503
Angle of operation*1 [°]	J1	360 (±180)*2
	J2	185 (-60~125)
	J3	160 (-160~0)
	J4	5400 (±2700)
	J5	246 (±123)
	J6	5400 (±2700)
Maximum load [kg]		40
peed of operation [° /s]	J1	170
	J2	150
	J3	165
	J4	265
	J5	250
	J6	340
Positioning repeatability [mm]		±0.06
Wrist allowable load moment [N·m]	J4	167
	J5	167
	J6	98
User air tube		1 circuits (inner diameter: φ12.5)
User signal wires		14-core (19-core connector)
		15-core (17-core connector)*3
Air source [MPa]	Maximum allowable pressure	2.0
Protection class		Wrist : IP67; rest of unit : IP65
Unit weight [kg]		655

*1 For positive/negative directions, see dimensional drawing and range of operation drawing. *2 When installed at an angle, the angle of operation will be subject to limitations. *3: Can be used as Profibus, DeviceNet, or Profinet by connecting the multi-bus cable

Dimensional drawing

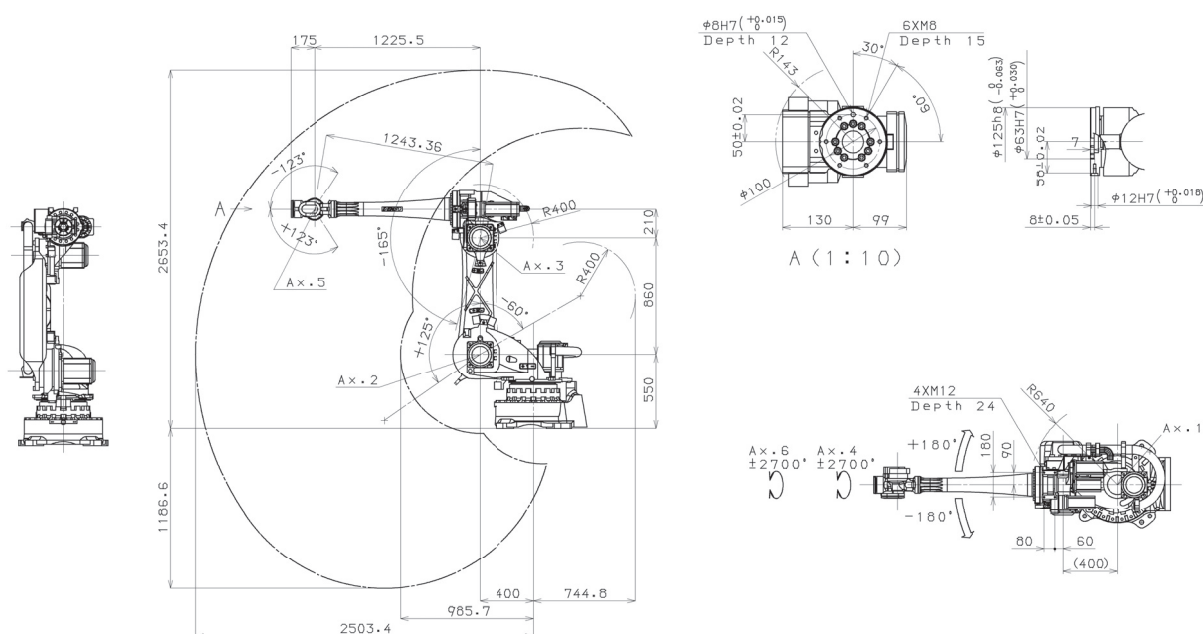

Options



- Multi-bus cables**

The VL series is wired internally for connection to field networks such as DeviceNet to reduce the complexity of wiring outside the unit.
- Robot fixing plate With leveling**
- Connector panel protective cover**
- Forklift attachment**
- Robot fixing plate kit Without leveling**
- Axis 1/2/3 Variable mechanical stopper (VL)**
- Power supply transformer (VL)**
3-phase 200 VAC → 3-phase 400 VAC

*Product appearance and specifications are subject to change without notice.

RC9 specifications

Specifications

Compatible robots		VMB-2515 series	VLA-4025 series
			
Power supply	Power supply capacity	4.5kVA	10.0kVA
	Input voltage range	3-phase 200 V AC -10% to 230 V AC +10%	3-phase 400 V AC -10% to 480 V AC +10%
	Power supply frequency	47~63Hz	
Power cable length		10m	
Number of control axes		6	
Control method		PTP, CP 3-dimensional straight line, 3-dimensional arc	
Drive method		All-digital AC servos for all axes	
Language		DENSO robot language (PacScript)	
Memory capacity		User domain Global variables: 32,766 (for each point); number of program files: up to 256	
Teaching method		1) Remote teaching 2) Numerical entry (MDI)	
External signals	Digital I/O	System (fixed): 8 dedicated inputs and 8 or 9 dedicated outputs (ships with No. 28 set to user output) User: 8 general-purpose inputs and 7 or 8 general-purpose outputs (ships with No. 28 set to user output)	
	Hand I/O	General-purpose inputs: 12; general-purpose outputs: 12	General-purpose inputs: 6; general-purpose outputs: 6 (including controller-controller cable)
	Safety I/O	System (fixed): 8 inputs and 8 outputs	
External communications	Ethernet	Panel: 1 line (GbE: Gigabit Ethernet)	
	USB	Panel: 1 line; internal: 3 lines	
Optional expansions		3 units	
Self-test function		Overrun, servo error, memory error, input error, short-circuit detection (user wiring), etc.	
Timer function		Unit: 1 ms	
Error display	External error output		
	Display of error codes on mini-pendant (option)		
	Display of error messages and recovery methods on teaching pendant (option)		
Environmental conditions (during operation)		Temperature: 0° C to 40° C; humidity: 20% to 90% RH (non-condensing)	
I/O power supply	Uses external power supply	Supply 24 V DC ±10% from external source.	
	Uses internal power supply	24 V DC ±10% is supplied by the controller.	
SCCR		5kA	
Stop category		1	
Safety-related control systems and performance		Emergency stop, protective stop, enable: PLd, Cat. 3	
Protection class		IP54	
Weight		65kg	85kg

※ The appearance and specifications are subject to change for improvement without prior notice.



Please visit our website for more information on products and functions.
<https://www.denso-wave.com/>



Official DENSO WAVE Channel:
Provides explanatory videos of functions, case studies, and robot applications.



DENSO Products and Services Americas, Inc.
3900 Via Oro Avenue, Long Beach, California, 90810, U.S.A.
Phone : +1-888-476-2689 FAX : +1-310-952-7502

DENSO KOREA CORPORATION
131, Seonggogae-ro, Uiwang-si, Gyeonggi-do, Korea 437-120
Phone : +82-31-340-1783 FAX : +82-31-8033-7213

DENSO TAIWAN CORP.
No.525 Sec.2, Mei Su Road, Jui Ping Li, Yang-Mei Town, Taoyuan Hsien, Taiwan
Phone : +886 3-482-8001 FAX : +886 3-482-8003

DENSO EUROPE B. V. DENSO Robotics Europe
Waldeckerstrasse 9 D-64546 Moerfelden-Walldorf, Germany
Phone : +49-6105-27-35-150 FAX : +49-6105-27-35-180

DENSO (CHINA) INVESTMENT CO., LTD.
No.35 Yuandian Road, Minhang District, Shanghai, CHINA 201108
Phone : +86-21-2350-0093 FAX : +86-21-2350-0179

DENSO SALES (THAILAND) CO.,LTD.
888 Moo 1, Bangna-Trad Rd. Km 27.5, T.Bangbor, A.Bangbor, Samutprakarn, 10560, Thailand
Phone : +66-2-315-9500 FAX : +66-2-315-9556